

RAIL WHEEL CONVEYORS | RCD-3 & RCD-1.5



Model RCD rail wheel conveyors is available in two popular styles. Model RCD-3 features wheels on 3" pattern while model RCD-1.5 includes 1-1/2" staggered dense wheel pattern.




SPECIFY MODEL NUMBER PER
EXAMPLE

RCD1.5-9

RCD(wheel configuration*)-(length)
*Specify 1.5 for 1-1/2" staggered wheel pattern or
3 for 3" wheel pattern.



For replacement wheels, refer to part #BRW04600

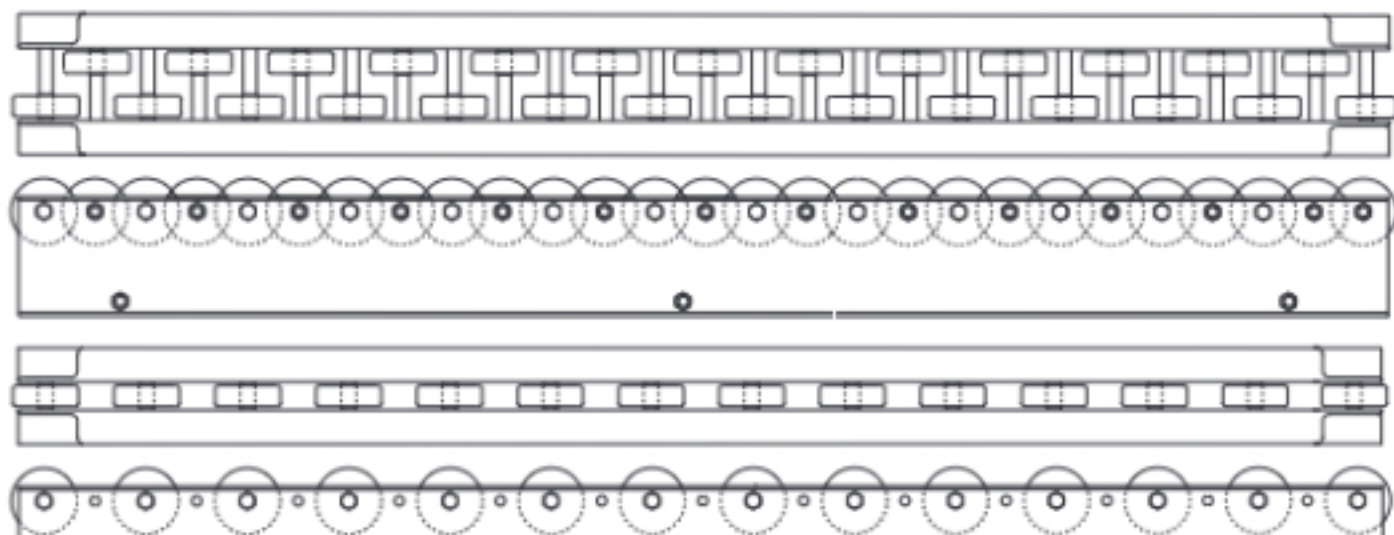

TECHNICAL DATA

Model	Weights Per FT. (lbs.)	Weights Per 10' (lbs.)	Wheels Per FT.	Max. Frame Capacity Per FT. (lbs.) 5' Support Center	Max. Frame Capacity Per FT. (lbs.) 10' Support Center
RCD-1.5	4.3	43	8	130	35
RCD-3	3.4	34	4	130	35

■ 2 week shipment

SPECIFICATIONS

- **RAILS:** 12 ga. galvanized steel rails are formed to two varying width rail wheel conveyors, models RCD.
- **WHEELS:** 1-15/16" dia. prelubricated ball bearing wheel with hardened raceway, zinc plated, 50 lb. capacity.
- **AXLES:** 1/4" dia. galvanized steel bolt-type with lock nut.
- **LENGTHS:** Available in 1'-0" increments from 1'-0" to 10'-0".
- **COUPLINGS:** Not supplied, specify type required for pricing.
- **WHEEL CENTERS:** Wheels provided on 3" centers with model RCD3; wheels provided on 1-1/2" centers, staggered pattern on model RCD1.5.